


Key Features

- Wireless presentation for upgraded efficiency
- Single cable via USB-C with
 65W power delivery
- 24/7 Sustainable video playback for continuous communication
- Remote device management with myViewBoard Manager
- ProAV compatibility with Crestron, Extron, and AMX



Product **Description**

With stunning 4K Ultra HD resolution, high brightness, and landscape and portrait modes, the CDE30 Series offers continuous and sustainable 24/7 display for both corporate and campus communication. Purpose-engineered for ease of use, the display is equipped with a Quad Core SoC to run multiple operations seamlessly, and its USB-C one-cable solution sorts for effortless connection with external devices. Designed for easy-to-operate continuous multimedia playback, the CDE30 Series offers cable-free screen casting and screen sharing through myViewBoard Display and ViewBoard Cast, which also supports Airplay and Chromecast. Remote management via the intuitive myViewBoard Manager makes changing content, broadcasting, and software updates a breeze. Available in 6 sizes ranging from 43" to 98", complete with daisy-chain compatibility, the CDE30 Series meets and exceeds the communication needs of any campus or corporate spaces.

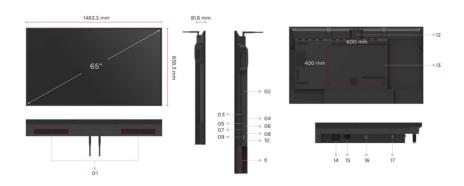

1. Speaker 2. OPS Slot 3. USB 2.0 4. RS-232 5. USB 3.0 6. USB-C 7. HDMI 1(ARC) 8. HDMI 2 9. HDMI OUT 10. HDMI 3 11. Control Panel 12. WiFi Slot 13. VESA® Wall Mount (600x400mm) 14. AC IN

15. Power Switch 16. LAN 17. SPDIF

Visit Us

www.viewsonic.com

DISPLAY 65" Panel Size: TFT LCD Module. ADS Type/ Tech: type, DLED backlight 1428.48 (H) ×803.52 Display Area (mm): (V) (64.5" diagonal) Native Resolution: 3840 x 2160 Aspect Ratio: 16:9 Colors: 1.07G (8bits + FRC-) Brightness: 450 nits (typ.) 1200:1 (typ.), 5000:1 Contrast Ratio: (DCR enabled) Response Time: 8ms Viewing Angles: H = 178, V = 178 typ.Backlight Life: 50,000 hours Anti-Glaire, 3H Surface Treatment: hardness, Haze 25% 14.7/14.7/14.7/14.7 Bezel: mm (L/R/T/B) Orientation: Landscape & Portrait **PLATFORM** Quad-core ARM Cortex Processor: A55 RAM: 4GB 32GB Storage: INPUT 2.1x3 (3840x2160 HDMI: @60Hz, HDMI 1 support ARC) RS-232: **OPS Slot:** WiFi Slot: x 1 OUTPUT 2.0 x1 (3840x2160 HDMI: @60Hz) SPDIF: x 1 LAN RJ45: x 1 **USB** Type A: 2.0 x 1, 3.0 x 1 x 1 ((DP1.2, PD 65W, Type C: USB2.0, 100M ethernet) **SPEAKERS** 10W x2 **EMBEDDED OS** Android 11 **POWER**

OPERATING CONDITIONS

Temperature (° C):	0 to 40°C
Humidity:	10%-90% RH

OPERATING HOURS

7/24

DIMENSIONS (WXHXD)

Physical (inch / mm):	57.61 x 33.0 x 3.21in/ 1463.3 x 838.3 x 81.6mm
Packaging (inch / mm):	63.78 x 37.09 x 8.19 in./1620 x 942 x 208

mm

WEIGHT

Net (lb / kg):	56.0 lbs/25.4 kg
Gross (lb / kg):	73.3 lbs/33.25 kg

REGULATIONS

cTUVus, FCC/ICES003, Energy star 8.0, EPEAT, Mexico NOM, Mexico Energy, EMC/CE, CB, EAC, UkrSEPRO, RCM, LBL, Flicker free, Green BOM, RoHS, ErP, REACH, SCIP, WEEE, Annex I, Annex II, TPCH, Packing waste, CA65

PACKAGE CONTENTS

- 1. Remote Control with batteries
- 2. Quick Start Guide
- 3. Power Cables
- 4. HDMI cable
- 5. USB-C cable
- 6. Wall Mount Screw x 4
- 7. RS232 adapter
- 8. Compliance statement

Copyright ${\tt @}$ ViewSonic Corporation 2000-2023. All rights reserved.

100-240 VAC +/- 10%

139 W(typ.) < 0.5W(off)

Voltage:

Consumption: