
Key **Features**

- Ultra Fine Touch Technology offering up to 40-point touch for a pen-on-paper writing experience
- myViewBoard Whiteboard software with engaging classroom tools
- Screen share via USB-C or wirelessly via myViewBoard Display and ViewBoard Cast with Airplay and Chromecast
- Intuitive remote device control and multimedia broadcast with myViewBoard Manager
- Android 11 OS powered by an octacore CPU for optimized efficiency and security



Product **Description**

Designed with modern educators in mind, the ViewBoard® 50-5 Series offers an intuitive and interactive interface for a multi-user writing experience. With a single-cable USB-C for instant, worry-free connectivity, teachers can seamlessly plug-in and control their devices while continuing the lesson. Both students and educators enjoy smooth writing with Ultra Fine Touch Technology offering 40-point touch, and the dual-pen that comes in a range of colors and sizes. Rest assured you and your students' eyes are cared for and protected as the ViewBoard® 50-5 Series comes with Flicker-Free technology and an integrated TÜV certified blue light filter for all brightness levels. Fully integrated with the myViewBoard suite, the ViewBoard® 50-5 Series brings together hardware and software for a complete classroom solution. Compatible with a full line of accessories, the ViewBoard® 50-5 Series enables you to effectively teach with a variety of engaging tools.

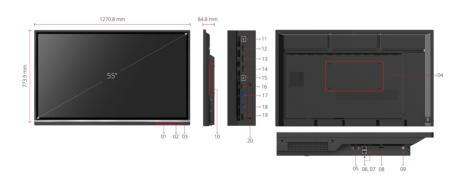

- 2. USB 3.0
- 3. USB 2.0
- 4. VESA® Wall Mount (400x200mm) 5. RS-232
- 6. LAN
- 7 ALIDIO OLIT
- 9. SPDIF 10. OPS Slot
- 11. TOUCH 1 12. HDMI 1
- 13. HDMI 2 14 HDML3
- 16. USB Type-C 17. USB 3.0

20. Wi-Fi Module Slot

Visit Us

www.viewsonic.com

PICRI AV	nttps://www.v	EDCONOMICS	WH 1 9550 5
DISPLAY	55"	ERGONOMICS	400
Panel Size:	55" TFT LCD Module with DLED	Wall Mount (VESA®): OPERATING CONDITIONS	400mm x 200 mm
Panel Type:	Backlight. IPS	Temperature (° C):	0°C to 40°C
Display Area (mm):	1209.6(H) x 680.4 (V)	Humidity:	10% ~ 90% RH non-condensing
Aspect Ratio:	16:9	DIMENSIONS (W X H X D)	
Resolution:	UHD 3840x2160	Physical (inch / mm):	49.9 x 30.4 x 3.3 in / 1268 x 773 x 85
Colors:	1.07B colors (8bit+FRC)	,	mm
Brightness:	350 nits (typ.)	Packaging (inch / mm):	56.2 x 34.6 x 8.7 in / 1428 x 878 x 220 mm
Contrast Ratio:	1200:1 (typ.) 5000:1 (DCR)	WEIGHT	
Response Time:	8ms	Net (lb / kg):	58.2lb/26.4kg
Viewing Angles:	H = 178, V = 178 typ.	Gross (lb / kg):	78.3lb/35.5kg
Backlight Life:	50,000 hours (Min)	REGULATIONS	
Surface Treatment:	Hardness: 7H, Anti-glare coating	cTUVus, FCC/ICES003, Energy Star 8.0, EMC/CE, CB/LVD, GOST-R/EAC, UkrSEPRO, EPEAT, Mexico NOM, Mexico Energy, UKCA, UK-EEL, BSMI, BIS, LBL(Low Blue Light Certification), Flicker Free, Green BOM, ROHS, ErP-Eco, REACH, SCIP, WEEE, TPCH, Packing waste, CA65, PAIA	
Bezel:	Slim		
Orientation:	Landscape		
PLATFORM		PACKAGE CONTENTS	
Processor:	ARM Cortex-A73*4 + Cortex-A53*4	1. Power cord	
RAM:	4GB	2. Remote control with AAA batter	у
Storage:	32GB	3. Touch USB cable	
TOUCH		4. Touch pen x 2	
Type/ Tech:	Ultra Fine Touch Techology (IR Recognition)	· (VB-PEN-009)	
Touch Resolution:	32767×32767	5. Quick Start Guide + Compliance statement	
Touch Point:	Windows: 40 points of touch, Android : 20 points of touch	6. RS232 adapter	
INPUT		7. Clamp x 5	
HDMI:	2.0 x 3 (3840x2160 @60Hz, HDCP2.2, HDMI1 with CEC/ARC)	8. Camera Plate 9. Screw x 8	
RS232:	x1		
OPS:	x1	10. HDMI cable	
WiFi:	x 1 module slot	11. Typc-C cable 1.8m	
OUTPUT		COMPATIBLE SLOT-IN PC	
HDMI:	x1 (4K@60Hz)	VPC2-O series • VPC2-O-B series O1-1B • VPC12-WPO-17 • VPC12	• VPC25-W33-O1-1B • VPC27-W53- -WPO-18
Audio:	x1 (Earphone out)		
SPDIF:	x1 (optical)		
LAN			
RJ45: USB	x2		
	2.0 x 2		
Type A:	3.0 x 4		
Type B:	x2, for touch		
Type C:	x1 (DP 1.2, USB2.0, PD65W, Ethernet 100M)		
SPEAKERS			
12W x 2 + 16W x 1 subwoofer			
TOP CAMERA PLATE			
Yes			
EMBEDDED OS			
Android 11			
BUNDLE SOFTWARE			
Basic Annotation Software:	myViewBoard		
Pro Annotation Software:	Pro Annotation Software: myViewBoard for Windows (Embedded in Windows Slot-in PC)		
Wireless Presentation:	vCast/myViewBoard Display App		
SPECIAL FEATURES			
All-in-one USB port:	"SmartPort™ USB" to all channels.		
Simple LAN sharing between IFP and slot-in device:	Simple LAN sharing between IFP and slot-in device		
Light Sensor:	Yes		
POWER			
Voltage:	100-240VAC +/- 10% Wide Range		
Consumption:	89W(typ.), 0.5W (off)		

Copyright © ViewSonic Corporation 2000-2023. All rights reserved.