


UHD35STx

Short throw 4K UHD gaming and home entertainment projector







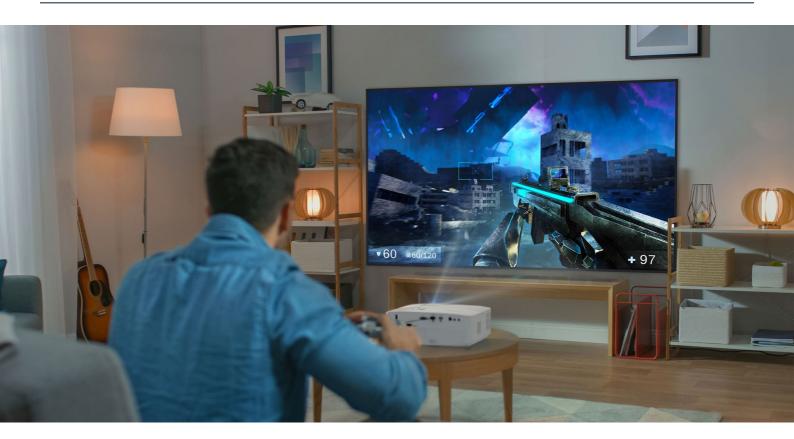

- Incredible True 4K UHD resolution visual experience - Perfect for big screen home entertainment and immersive gaming
- Short throw projection Supersized 100" image from just over a metre away
- Lights on viewing Bright 3600 lumens
- Created for a competitive gaming advantage -Supports 1080p 240Hz at 4.2ms and 4K 60Hz at 16.9ms

Immerse yourself in a world of Ultra HD gaming, live sports and TV shows. The UHD35STx delivers impressive bright 4K UHD high-quality images, lightning-fast input lag as low as 4ms and a high refresh rate of 240Hz - perfect for a competitive gaming advantage.



Featuring a short throw lens, it can be placed just over a metre away from the projection area while creating a supersized 100" image.

Specifications

Vertical scan rate

Connectivity

UPC: 796435814533, EAN: 5055387666443, Colour: White

Display/image Display technology DIPTM Resolution UHD (3840x2160) 3,600 lumens Brightness Contrast ratio 1,000,000:1 Native aspect ratio 16.9 Aspect ratio - compatible 4:3 +/-40° Keystone correction horizontal Keystone correction - vertical +/-40° Horizontal scan rate 31 ~ 135Khz

24 ~ 120Hz 80% Uniformity

0.93m ~ 7.63m (36.43" ~ 300.53") diagonal Screen size

Lamp info Light source type Lamp 240 Lamp watts

4000 (Bright), 15000 (Dynamic), 10000 (Eco) Lamp life hours (up to)

Optical 0.5:1 Throw ratio Projection distance (m) 0.4m - 3.3m Zoom Zoom type Fixed Focal length (mm) 7.51mm Lens shift Vertical +0% Native offset 116%

Connections Inputs 2 x HDMI 2.0

Outputs 1 x Audio 3.5mm, 1 x S/PDIF, 1 x USB-A power

Control 1 x RS232, 1 x 12V trigger

General Noise level (typical) 24dB Noise level (max) 28dB

UHD, WQHD, WUXGA, FHD, UXGA, SXGA, WXGA, HD, XGA, PC compatibility

SVGA, VGA, Mac

2D compatibility 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz), 2160p(50/60Hz)

Frame-pack: 1080p24, 720p50 / 60

3D compatibility 3D Full 3D

Security bar, Kensington Lock, Password protected interface Security 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish OSD / display languages

5°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max

humidity 85%

Backlit home remote Remote control

Speaker count Watts per speaker 10W

In the box AC power cord Remote control

2x AAA batteries Basic user manual

Input lag 4.00ms

Power

Operating conditions

100 ~ 240V, 50 ~ 60Hz Power supply

Power consumption (standby) 0.5W Power consumption (min) 220W Power consumption (max) 320W

Weight and dimensions

315 x 270 x 118 Dimensions (W x D x H) mm Gross weight 4.68 kg Net weight 3.98 kg





