


## Key Features

- 3,500 ANSI Lumens offering bright images in any environment
- Native 1080p Full HD resolution for captivating details
- 1.3x optical zoom & digital lens shift for flexible installation
- True-to-life SuperColor™ Technology



## Product Description

The ViewSonic PX703HDH is a practical Home Cinema Projector, featuring 3500 ANSI lumens, 1080p Full HD resolution, and ViewSonic's exclusive SuperColor™ technology, which together produce the finest of details and stunning colour in any medium sized space. The projector comes with an energy-saving SuperEco+ mode that reduces power consumption and extends lamp life to up to 20,000 hours, reducing the frequency of lamp replacement and lowering maintenance costs. Digital lens shift and H/V keystone help users easily set up the projector at any angle. Dual HDMI input and USB power supply further increase the flexibility of the user's entertainment experience.

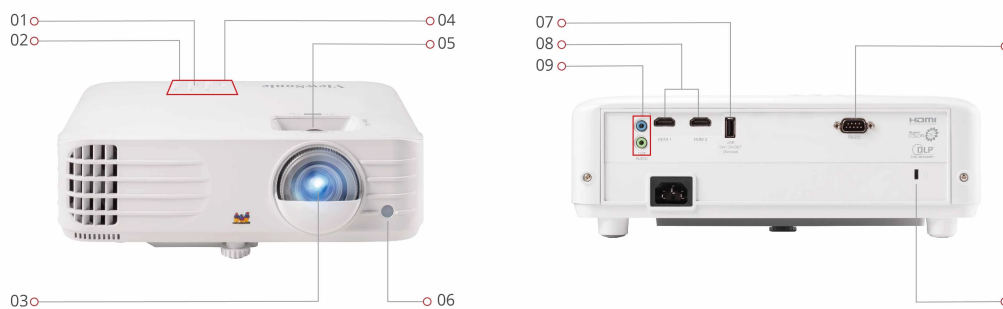

1. LED Indicator
2. Keypad
3. Lens
4. Power Key
5. Zoom/Focus
6. Front IR
7. USB Type A

8. HDMI
9. Audio In/Out
10. RS-232
11. Kensington Lock

SPECIFICATION

Native Resolution:	1920x1080
DMD Type:	DC3
Brightness:	3500 (ANSI Lumens)
Contrast Ratio with SuperEco Mode:	12000:1
Display Color:	1.07 Billion Colors
Light Source Type:	Lamp
Light Source Life (hours) with Normal Mode:	5000
Light Source Life (hours) with SuperEco Mode:	20000
Lamp Watt:	203W
Lens:	F=1.9-2.47, f=12-15.6mm
Projection Offset:	110%+/-6%
Throw Ratio:	1.13-1.47
Optical Zoom:	1.3x
Digital Zoom:	0.8x-2.0x
Image Size:	30"-300"
Throw Distance:	0.75m-9.76m (100"@2.5m)
Keystone:	+/- 40° (V)
Lens Shift V. Range:	+/- 5% (Digital)
Audible Noise (Normal):	31dB
Audible Noise (Eco):	27dB
Input Lag:	16ms
Resolution Support:	VGA(640 x 480) to WUXGA_RB(1920 x 1200) *RB-Reduced Blanking
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Horizontal Frequency:	15K-102KHz
Vertical Scan Rate:	23-120Hz

INPUT

HDMI:	2 (HDMI 1.4/ HDCP 1.4)
Audio-in (3.5mm):	1

OUTPUT

Audio-out (3.5mm):	1
Speaker:	10W
USB Type A (Power):	1 (5V/1.5A)

CONTROL

RS232 (DB 9-pin male):	1
USB Type A (Services):	1 (share with USB A Output)

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Power Consumption:	Normal: 300W Standby: <0.5W
Operating Temperature:	0~40°C
Carton:	Brown
Net Weight:	2.62kg
Gross Weight:	3.78kg
Dimensions (WxDxH) with Adjustment Foot:	312x222x108mm
Packing Dimensions:	415x168x297mm
OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S- Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Total 23 languages
User Guide Language:	English, S-Chinese, T- Chinese, Indonesian, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai, Vietnamese, Total 20 languages

STANDARD ACCESSORY

Power Cord:	1
Remote Control:	1
QSG:	Yes
Warranty Card:	Yes (CN Only)

OPTIONAL ACCESSORY

Lamp/Light Source:	RLC-123
Wall/Ceiling Mount:	PJ-WMK-007
Carry Bag:	PJ-CASE-008