


Key Features

- True 4K UHD visual experience
- Cinema SuperColor+™ Technology with 125% Rec.709
- 2nd generation LED technology with 30,000 hours lifespan
- Wide H/V lens shift for flexible installation
- Extremely low fan noise (20 dB) ensuring pure viewing



Product Description

ViewSonic's X100-4K is a 2,900 LED Lumens 4K UHD home cinema projector of superior performance and great value. Fulfilling movie lovers' dreams with 2nd generation LED technology, for cinematic colors and reliable light source life, low fan noise (20 dB), wide H/V lens shift and optical zoom combined into a proprietary design, the X100-4K serves as a professional choice for every home.

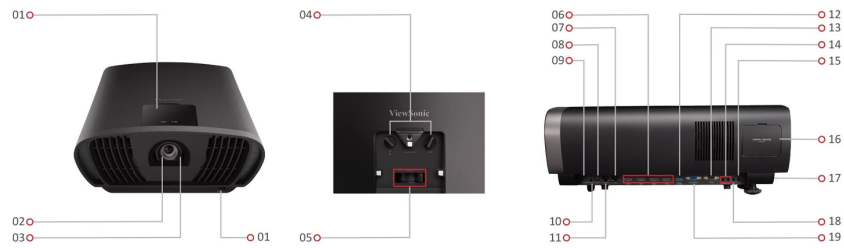

- | | | |
|-----------------------------|---------------------------|----------------------------|
| 1. IR Receiver(Front & Top) | 8. S/PDIF Out | 15. Audio Out |
| 2. Lens | 9. Service | 16. Keypad |
| 3. Motorized Lens Cover | 10. Wire IR | 17. Wi-Fi Dongle(Optional) |
| 4. Lens Shift Control Knob | 11. Control | 18. AUX |
| 5. Zoom Ring | 12. USB Reader 3.0(5V/2A) | 19. Computer In |
| 6. HDMI 2.0/HDCP 2.2 | 13. RS232 | |
| 7. LAN | 14. 12V Trigger X2 | |

Visit Us ■ www.viewsonic.com

SPECIFICATION		INPUT		OTHERS	
Native Resolution:	3840x2160	Computer in (share with component):	1	Power Supply Voltage:	
Brightness:	2900 (LED Lumens)	HDMI:	4, (HDMI 2.0, HDCP 1.4/2.2)	Power Consumption:	
Contrast Ratio:	3000000:1			Operating Temperature:	
Display Color:	1.07 Billion Colors			Audio-in (3.5mm):	1
Light Source Type:	LED	USB Type A:	2, (USB3.0 Reader x1,, USB2.0 Reader x1)	Dimensions (with Adjustment):	
Light Source Life (hours) with Normal Mode:	up to 30000				
Lamp Watt:	RGBB LED				
Lens:	F1.8-1.825, f=12.62-15.13mm	RJ45 Input (Internet):	1		
		Wifi Input:	1 (5Gn)		
		OUTPUT			
Projection Offset:	0%	Audio out (3.5mm):	1	OSD Language:	
Throw Ratio:	1.2-1.44	S/PDIF:	1		
Optical Zoom:	1.2x	Speaker:	20W Cube x2		
Image Size:	40"-200"	USB Type A (Power):	2, (USB3.0 - 5V/2A x1,, USB2.0 - 5V/900mA x1,, share with USB A Input)	STANDARD	
Throw Distance:	1.06m-6.37m , (100				
Keystone:	+/- 40° (V)				
Lens Shift V. Range:	+65%, -0%	12V Trigger (3.5mm):	2	Power Cord:	
Lens Shift H. Range:	+25%, -25%				
Audible Noise (Normal):	23dB				
Audible Noise (Eco):	20dB	CONTROL			
Local Storage:	Total 16GB , (12GB available storage)	RS232 (DB 9-pin male):	1 (Female)		
		RJ45 (LAN control):	1		
		USB Micro B-2.0 (Services):	1		
Input Lag:	66.8 ms				
Resolution Support:	VGA(640 x 480) to , 4K(3840 x 2160)				
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i,				
Copyright © ViewSonic Corporation 2000-2022. All rights reserved.					

1080p,
2160P

Horizontal Frequency:

15K-
135KHz

Vertical Scan Rate:

23-120Hz